


# H05RN-F

Flexible cables epr rubber insulated, polychloroprene sheathed.



## Packing

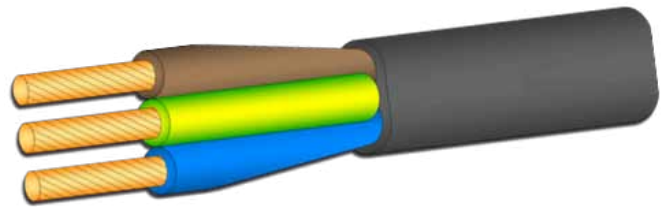

## Wire description

H05RN-F „size mm<sup>2</sup>“ PMB

## Construction

Wire core:	Flexible copper class 5 CEI EN 60228
Insulation:	Rubber type E14 / EM2
Min. bending radius:	Fixed installation: 3 x outer diameter Mobile installation: 4 x outer diameter

## Standards and approvals



## Charakteristics

Operating temperature:	-25°C to + 60°C on the conductor
Max. temperature of short circuit	200°C on the conductor (max duration 5 seconds)
Rated voltage:	300 / 500 V

Wire description	Nominal size	Insulation thickness	Sheath thickness	Outer diameter
	mm <sup>2</sup>	mm	mm	mm
H05RN-F	2 x 0,75	0,60	0,80	6,10
	2 x 1	0,60	0,90	6,60
	3G0,75	0,60	0,90	6,60
	3G1	0,60	0,90	7,00
	4G0,75	0,60	0,90	7,20
	4G1	0,60	0,90	7,60