


FLY

Single-core flexible cable to din 72551/2.



Packing

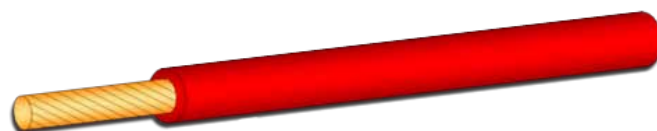

Standards and approvals



Wire description

FLY

Construction

Wire core:	Flexible copper ISO 6722
Insulation:	PVC
Min. bending radius:	-

Charakteristics

Operating temperature:	70° C max on the conductor
Max. temperature of short circuit	-
Rated voltage:	< 50 V a.c. < 75 V d.c.

Nominal size	Aver. insulation thickness	Outer diameter	Max cond.resist. at 20° C	Cable weight
mm ²	mm	mm	Ohm/km	kg/km
0,50	0,6	2,15	37,1	8
0,75	0,6	2,40	24,7	12
1,0	0,6	2,55	18,5	15
1,5	0,6	2,90	12,7	19
2,5	0,7	3,55	7,600	28
4	0,8	4,30	4,710	49
6	0,8	4,90	3,140	67
10	1,0	6,40	1,820	116
16	1	7,7	1,16	184
25	1,2	9,70	0,743	290
35	1,2	11,20	0,527	405