


# FLRY-B FLRY-A

Single-core flexible cable to din 72551/6.



## Packing

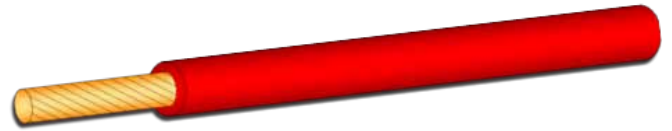

## Wire description

FLRY-B / FLRY-A

### Construction

Wire core:	Flexible copper ISO 6722
Insulation:	PVC
Min. bending radius:	-

## Standards and approvals



## Charakteristics

Operating temperature:	90° C max on the conductor
Max. temperature of short circuit	-
Rated voltage:	< 50 V a.c. < 75 V d.c.

Nominal size	Aver. insulation thickness	Outer diameter	Max cond.resist. at 20° C	Cable weight
mm <sup>2</sup>	mm	mm	Ohm/km	kg/km
0,35	0,3	1,35	55,5	4
0,50	0,3	1,50	37,1	7
0,75	0,3	1,80	24,7	9
1,00	0,3	2,00	18,5	12
1,50	0,35	2,30	12,7	17
2,50	0,35	2,90	7,6	28
4	0,35	3,60	4,7	44
6	0,40	4,20	3,1	64