


# H03VV-F H03VVH2-F

Flexible electric cables PVC insulated, under medium weight PVC sheath.



## Packing

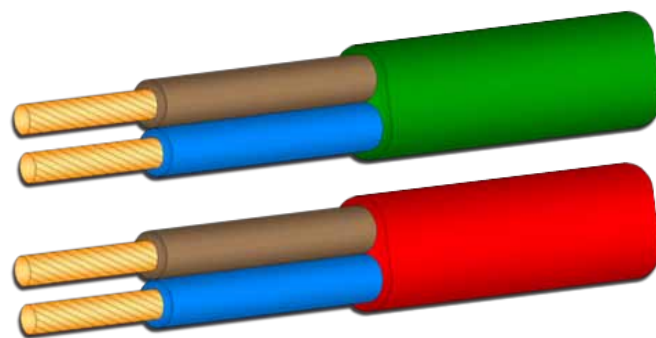

## Wire description

H03VV-F / H03VVH2-F „size mm<sup>2</sup> „, PMB

## Construction

Wire core:	Flexible copper class 5 CEI EN 60228
Insulation:	PVC TI2 / PVC TM2
Min. bending radius:	Fixed installation: 3 x outer diameter Mobile installation: 4 x outer diameter

## Standards and approvals



## Charakteristics

Operating temperature:	+ 5°C to + 60°C on the conductor
Max. temperature of short circuit	150°C on the conductor (max duration 5 seconds)
Rated voltage:	300 / 300 V

Wire description	Nominal size	Insulation thickness	Sheath thickness	Outer diameter
	mm <sup>2</sup>	mm	mm	mm
H03VVH2-F	2 x 0,5	0,50	0,60	3,1x5
	2 x 0,75	0,50	0,60	3,3x5,4
H03VV-F	2 x 0,5	0,50	0,60	5,00
	2 x 0,75	0,50	0,60	5,40
	3G0,5	0,50	0,60	5,30
	3G0,75	0,50	0,60	5,75
	4G0,5	0,50	0,60	5,80
	4G0,75	0,50	0,60	6,30