


H03V2V2-F H03V2V2H2-F

Flexible cables under light PVC sheath, heat resistant to a max temperature of 90°C on the conductor.



Packing

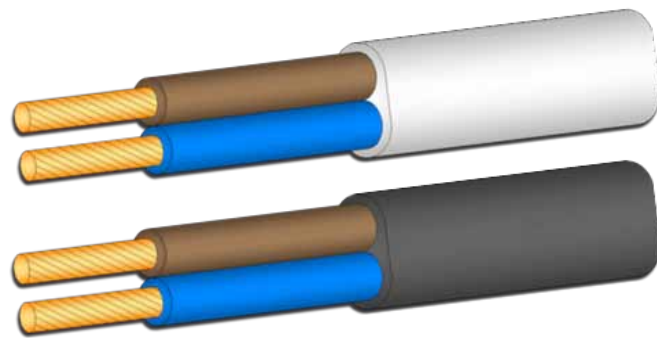

Wire description

H03V2V2-F / H03V2V2H2-F „size mm²“ PMB

Construction

Wire core:	Flexible copper class 5 CEI EN 60228
Insulation:	PVC TI3 / PVC TM3
Min. bending radius:	Fixed installation: 3 x outer diameter Mobile installation: 4 x outer diameter

Standards and approvals



Charakteristics

Operating temperature:	+ 5°C to + 90°C on the conductor
Max. temperature of short circuit	150°C on the conductor (max duration 5 seconds)
Rated voltage:	300 / 300 V

Wire description	Nominal size	Insulation thickness	Sheath thickness	Outer diameter
	mm ²	mm	mm	mm
H03V2V2H2-F	2 x 0,5	0,50	0,60	3,1x5
	2 x 0,75	0,50	0,60	3,3x5,4
H03V2V2-F	2 x 0,5	0,50	0,60	5,00
	2 x 0,75	0,50	0,60	5,40
	3G0,5	0,50	0,60	5,30
	3G0,75	0,50	0,60	5,75
	4G0,5	0,50	0,60	5,80
	4G0,75	0,50	0,60	6,30